


EV CHARGING INDUSTRY

EV CHARGING CABLE

BESSEN

The line is matte, soft and flexible, and can be used normally in cold areas

Cable material is TPU/TPE, flame retardant, UV resistant

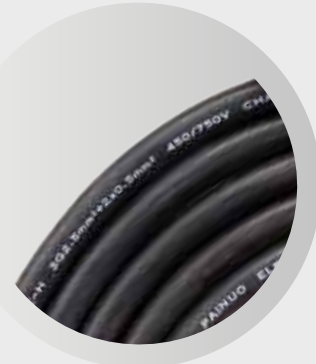

Advanced crimping technology makes the pins difficult to loosen

The pins are compact and automatically filters dust and does not generate electric sparks

The pins are silver plated and have good conductivity, not easy to be overheated



The entire plug is designed to prevent water and dust from entering and can work in water also with temperature control function



The pins can be used more than 50,000 times






The handle is ergonomically designed for easy and comfortable grip



The locking device at the end of the plug is very tight and waterproof.



The cable is CE/TUV certificated

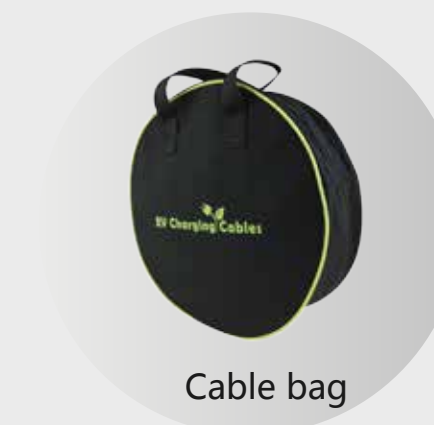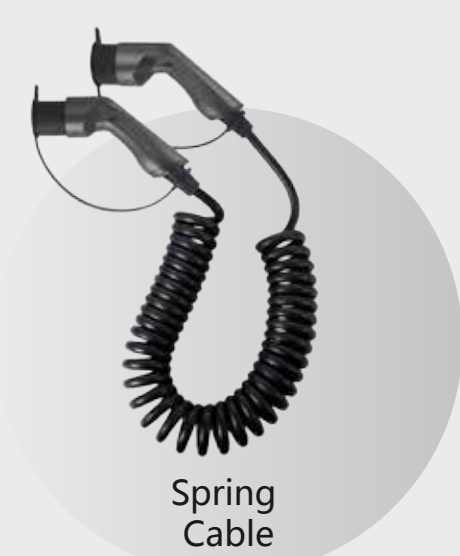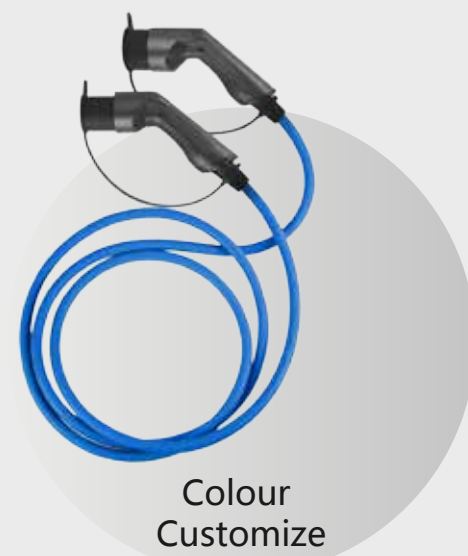

Meet IEC 62196-2 (Mennekes, Type 2) EU European standard

Basic Specification

Customization service

Contact information

Model:

BS-CHC001 (16A 1phase, 3.6kw) BS-CHC003 (32A 1phase, 7.2kw)
 BS-CHC002 (16A 3phase, 11kw) BS-CHC004 (32A 3phase, 22kw)

- Standard: Type2 male to female plug - Length: 5m or customize
 - Rated current: 16A / 32A - Color: Black or customize
 - Rated voltage: 230V ± 10% / 380V ± 10% - Package: 1 carton inner box
 - Certificate: CE, TUV

-OEM service -Color of plug
 -Color & length of cable -LOGO on plug

Web: www.besen-group.com Tel: +86-25-8662-3210
 E-mail: info@besen-group.com Fax: +86-25-8662-3210

LEADING THE EV CHARGING TO A BETTER WAY